



What to Know Before Getting Started

This guide provides instructions for applying set screws to Krieger's perimeter seal system retainers, which are designed with slotted holes for adjustability.



We're Here to Help

At Krieger, we understand every project is unique. If after reviewing this guide, you have any questions or concerns about installing, adjusting, or maintaining your Krieger product, our engineering department is here to help.

Please call us directly at **562-695-0645** or reach out to your regional sales representative.

Visit [kriegerproducts.com/contact/](https://www.kriegerproducts.com/contact/) for more information.



Made in the USA


All Krieger products are proudly designed and manufactured in the United States.

Overview

- Over time, the retainers may shift out of position due to the way door panels interact with the retainers and torqued screws.
- If a shift occurs, Krieger recommends the utilization of “set screws” or “locking screws,” which are additional screws that run through the non-slotted sections of the retainer steel.
- Set screws should only be utilized once it has been determined that the perimeter seal is adjusted for optimal performance.
- The seal systems remain adjustable as necessary; however the set screws would need to be removed to allow the retainers to travel again.

Adjustment Instructions

- Refer to the illustration for how to apply the set screws.
- Any fastener can be used as a set screw and should exceed 24" O.C. with a minimum of two per retainer.
- Set screws that are applied to the head of paired openings should be placed closer to the meeting stile.

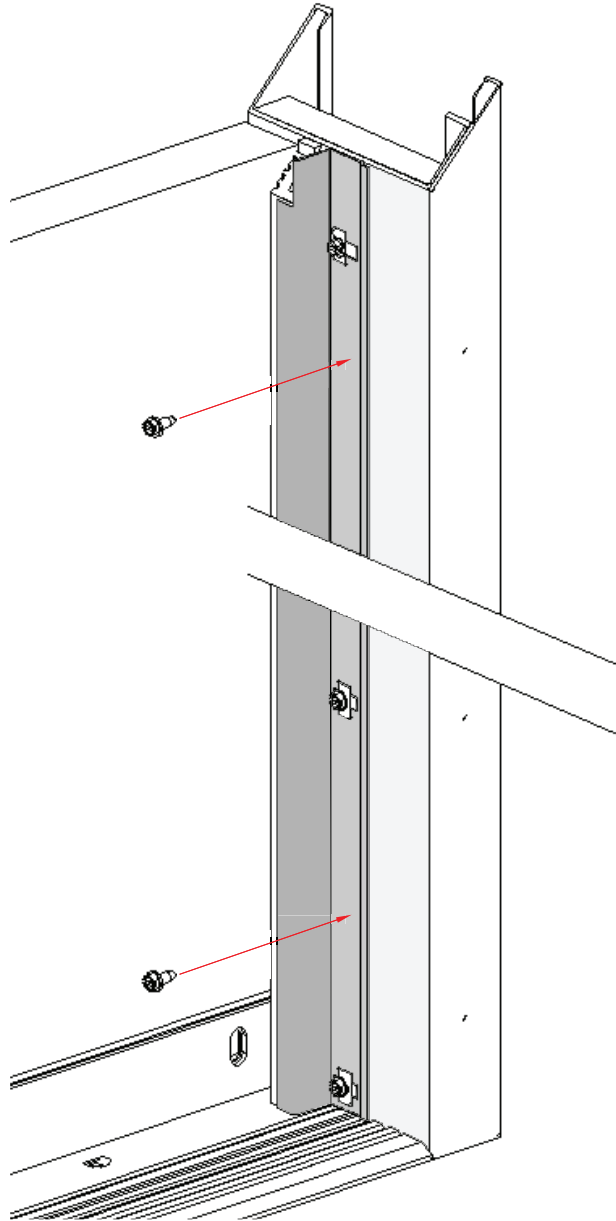

End Instructions