



## What to Know Before Getting Started

**NOTE:** When installing hardware on radio frequency (RF) assemblies, it is important to install the provide RF gasket between the hardware and the door as described in this installation guide.



### We're Here to Help

At Krieger, we understand every project is unique. If after reviewing this guide, you have any questions or concerns about installing, adjusting, or maintaining your Krieger product, our engineering department is here to help.

Please call us directly at **562-695-0645** or reach out to your regional sales representative.

Visit [kriegerproducts.com/contact/](https://www.kriegerproducts.com/contact/) for more information.



### Made in the USA

All Krieger products are proudly designed and manufactured in the United States.

## Installation Instructions

### STEP 1


Clean the bare stainless surface around the hardware prep with alcohol to ensure a proper seal.

### STEP 2

With clean hands, place the gasket between the hardware and the door on the push side only to contact the bare stainless surface.

### STEP 3

**DO NOT** add adhesives or additional materials such as trim plates to the gaskets.

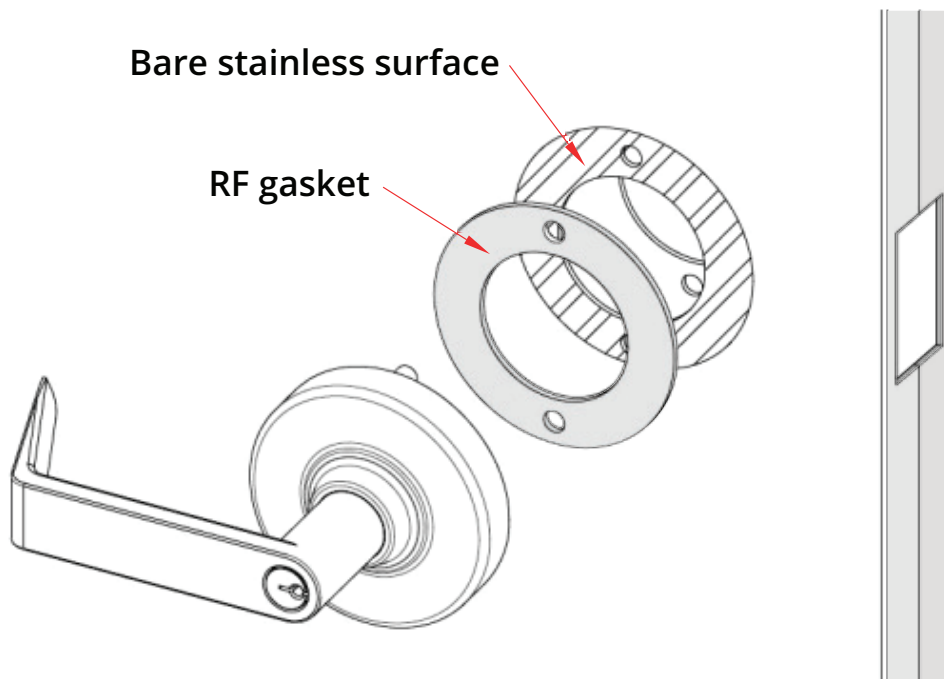

End Instructions