

ADA COMPLIANT FIRE RATED UP TO 60 MINUTES 2" THICK DOOR PANEL

Krieger's industry-leading bullet doors are designed to protect personnel and property from bullets and ricochet. This door comes with a UL 752 Level 3 bullet rating, which means it can stop up to 3 shots from a .44 Magnum pistol.

Door Panel and Frame

Krieger's UL 752 Level 3 bullet door is available as a single or double door panel and frame, and feature specially engineered frame profiles that complement any wall construction or architectural style.

All Krieger bullet doors are guaranteed to perform according to your specifications.

- If your project requires a vision lite, Krieger provides UL 752 Level 3-rated bullet glass to be installed on site by your glazer.
- A continuous hinge for the door assembly is available upon request.

Wood Finishes

Krieger wood veneers come in a full range of wood species and types to perfectly match your aesthetic and performance needs.

Species and Type

Select the wood species or type of wood you want to use. Forest Stewardship Council® (FSC) certified wood is available.

Finish Options

You can specify whether you need unfinished or clear coat—and for stained finishes, you send us a stain color to match.



All Krieger doors are backed by our 10 Year Manufacturer's Guarantee.

KRIEGERSPECIALTY PRODUCTS

Rev. 1-041524

Customize Your Assembly

Contact your Krieger sales representative to discuss your project requirements, get a quote, and request full test report data.

Call us at 562-695-0645 or visit KriegerProducts.com to get started.

Features

Tests and Certifications

- UL 752 11th Edition Level 3 bullet rating means it can withstand 3 impacts of .44 Magnum pistol loading 240 grain lead/gas shock ammunition shot at 1350 FPS.
- UL 752 is the most widely used and accepted rating system for ballistic-grade materials.
- Meets NIJ Standard 0108.01 Level IIIA, which can stop up to 5 shots from a .44 Magnum pistol.

Door and Frame Construction

- Choice of frame design includes: slip-in with trim, Z anchor, nailing straps, T anchor, and punch & dimple.
- Constructed with formed, heavy gauge steel face sheets around a custom engineered steel rib core with interior armor plate.
- Features 2" thick door panel and can meet all specifications for size, finish, and performance; contact us to customize your assembly.
- Three-sided frame design does not require a threshold.
- Complies with ADA requirements for maximum force for push/pull.

Door Sizes

 Krieger can design and manufacture bullet doors in standard and custom sizes; contact us to discuss your project.

Fire Labels and Positive Pressure

- Up to 60 Minutes: UL 10C, UBC 7-2, UBC 7-4, 250°, 450°, 650° temperature rise up to 10'0" x 9'10" opening size
- Smoke Labels: Up to 20 minutes

Door Handing

Krieger doors are available in any door handing configuration your project requires.









Hardware

- Bullet doors with a UL 752 11th Edition Level 3 rating do not come with hinges; however, Krieger can provide a continuous hinge upon request. Butt hinges can also be used, purchased separately.
- Designed to interface with standard builder's hardware, including latches and locksets, panic devices, security hardware, access control, and other options.

Wood Finishes

- Krieger wood veneers come in a full range of wood species and types to perfectly match your aesthetic and performance needs.
- Krieger proudly offers wood finishes certified by the Forest Stewardship Council® (FSC).

Vision Lites • Side Lites • Transoms

- Krieger offers tested and certified glass or glass/polycarbonate glazing materials for bullet door assemblies with vision lites, side lites, and/or transoms. Bullet glass UL 752 11th Edition rating must match the rating for the door assembly.
- All glass is shipped along with the door assembly to be installed at the job site by your glazer.
- Option to add adjustable blinds in between the panes of glass to control the amount of light and provide added privacy and security.











Optional Add-Ons

Specialized Hybrid Performance

All Krieger doors can be configured with optional add-on features and different ratings to meet your specific performance needs.

- Acoustical & SCIF
 Add sound rating up to STC 55 and SCIF Sound Group 3 or 4.
- Blast & Pressure
 UFC 4-010-01 and UFC 3-340-02 certifications are available.
- Forced Entry
 Enhance security with an ASTM F476 Grade 40 label.
- Radio Frequency
 40 dB or 60 dB RF shielding; meets TEMPEST standard.
- Tornado & Hurricane Can comply with FEMA P-361 or FEMA P-320 criteria.





Elevation View







Double Doors


This Krieger bullet door is available as a constructed assembly with an astragal or a mullion, no UL 752 label. Contact us for more information.



Frame Detail

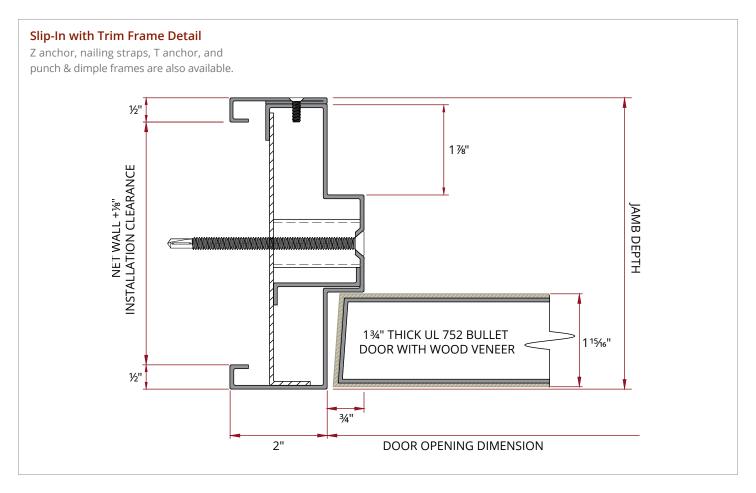

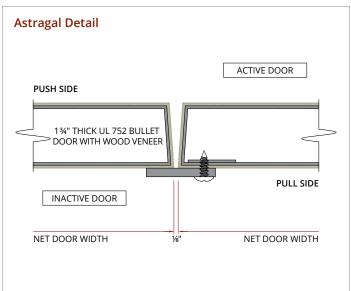

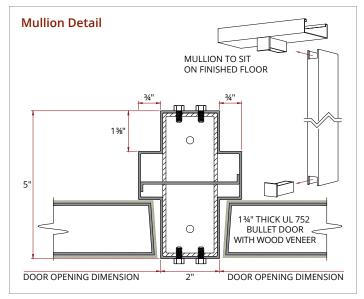



Door Bottom

