

KriegerBullet Level 8 Hollow Metal Door

Model: BR-HM-LVL8




ADA
COMPLIANT

FIRE RATED
UP TO 3 HOURS

1 3/4" THICK
DOOR PANEL

The industry-leading KriegerBullet door assembly is engineered to protect personnel and property from bullets and ricochet. This door comes with a UL 752 Level 8 bullet rating, which means it can stop up to 5 shots from a 7.62 high-powered AK-47-style tactical rifle.

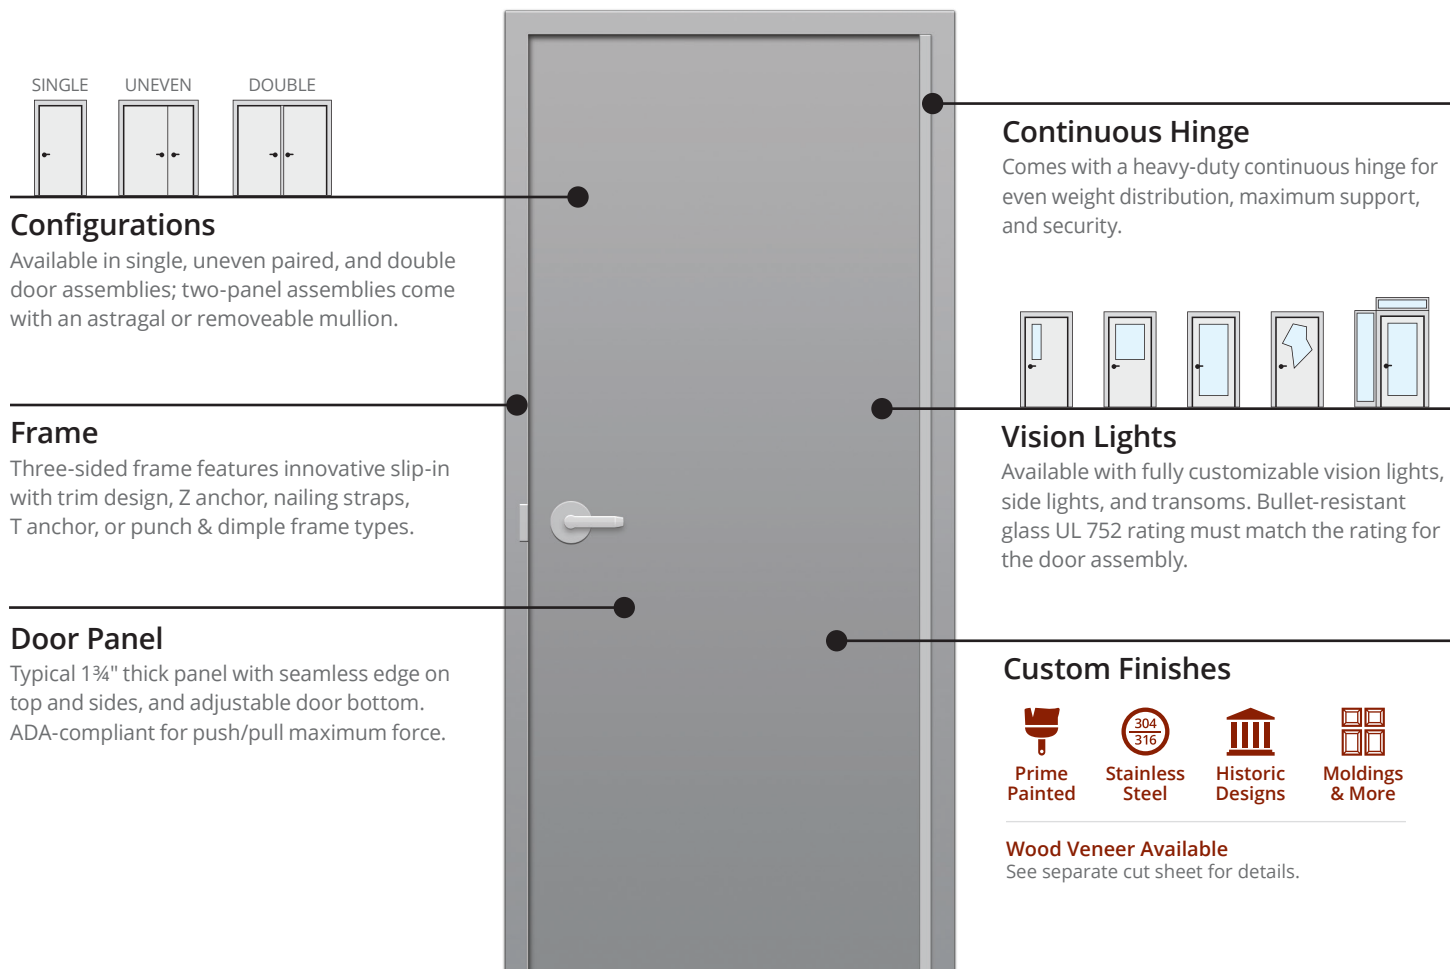

Customize Your Assembly

Contact your Krieger Regional Sales Manager to discuss your project requirements, get a quote, and request full test report data.

Call us at 877.671.7011 or visit KriegerProducts.com to get started.

HM-00013 May 2026





Tests and Certifications

- UL 752 11th Edition Level 8 bullet rating means it can withstand 5 impacts of 7.62 mm .308 Winchester loading 150 grain rifle ammunition shot at 2750 maximum FPS.
- UL 752 is the most widely used and accepted rating system for ballistic-grade materials.
- Meets National Institute of Justice (NIJ) Standard 0108.01 Type IV, which can stop 1 shot from a .30 caliber rifle.

Door and Frame Construction

- Choice of frame design includes: slip-in with trim, Z anchor, nailing straps, T anchor, and punch & dimple.
- Constructed with formed, heavy-gauge steel face sheets around a custom engineered steel rib core with interior armor plate.
- Features 1 3/4" thick door panel and can meet all specifications for size, finish, and performance; contact us to customize your assembly.
- Three-sided frame design does not require a threshold. Aluminum threshold is available upon request.
- Door panel meets ADA requirements for push/pull maximum force.

Fire Labels and Positive Pressure

- **Up to 3 Hours:** UL 10C, UBC 7-2, UBC 7-4, 250°, 450°, 650° temperature rise up to 10'0" x 9'10" opening size
- **Smoke Labels:** Up to 20 minutes

Door Sizes


- All KriegerBullet doors are available in standard and custom sizes, including oversized doors.

Hardware

- This UL 752 11th Edition Level 8-rated bullet door comes with a heavy-duty continuous hinge for even weight distribution, maximum support, and security.
- Designed to interface with recommended builder's hardware, including latches and locksets, panic devices, security hardware, access controls, and other options.

Finishes

- Krieger's custom finish options include prime painted, stainless steel, specialty finishes, and more—all perfectly matched to complement your project.
- Wood veneer is available. See separate cut sheet for details.




Vision Lights • Side Lights • Transoms

- Fully customizable vision lights, side lights, and transoms are available.
- Krieger offers tested and certified glass or glass/polycarbonate glazing materials for bullet door assemblies with vision lights, side lights, and/or transoms.
- Bullet glass UL 752 11th Edition rating must match the rating for the door assembly.
- All glass is shipped along with the door assembly to be installed at the job site by your glazer.
- Option to add adjustable blinds in between the panes of glass to control the amount of light and provide added privacy and security.



Elevation View

Single Door

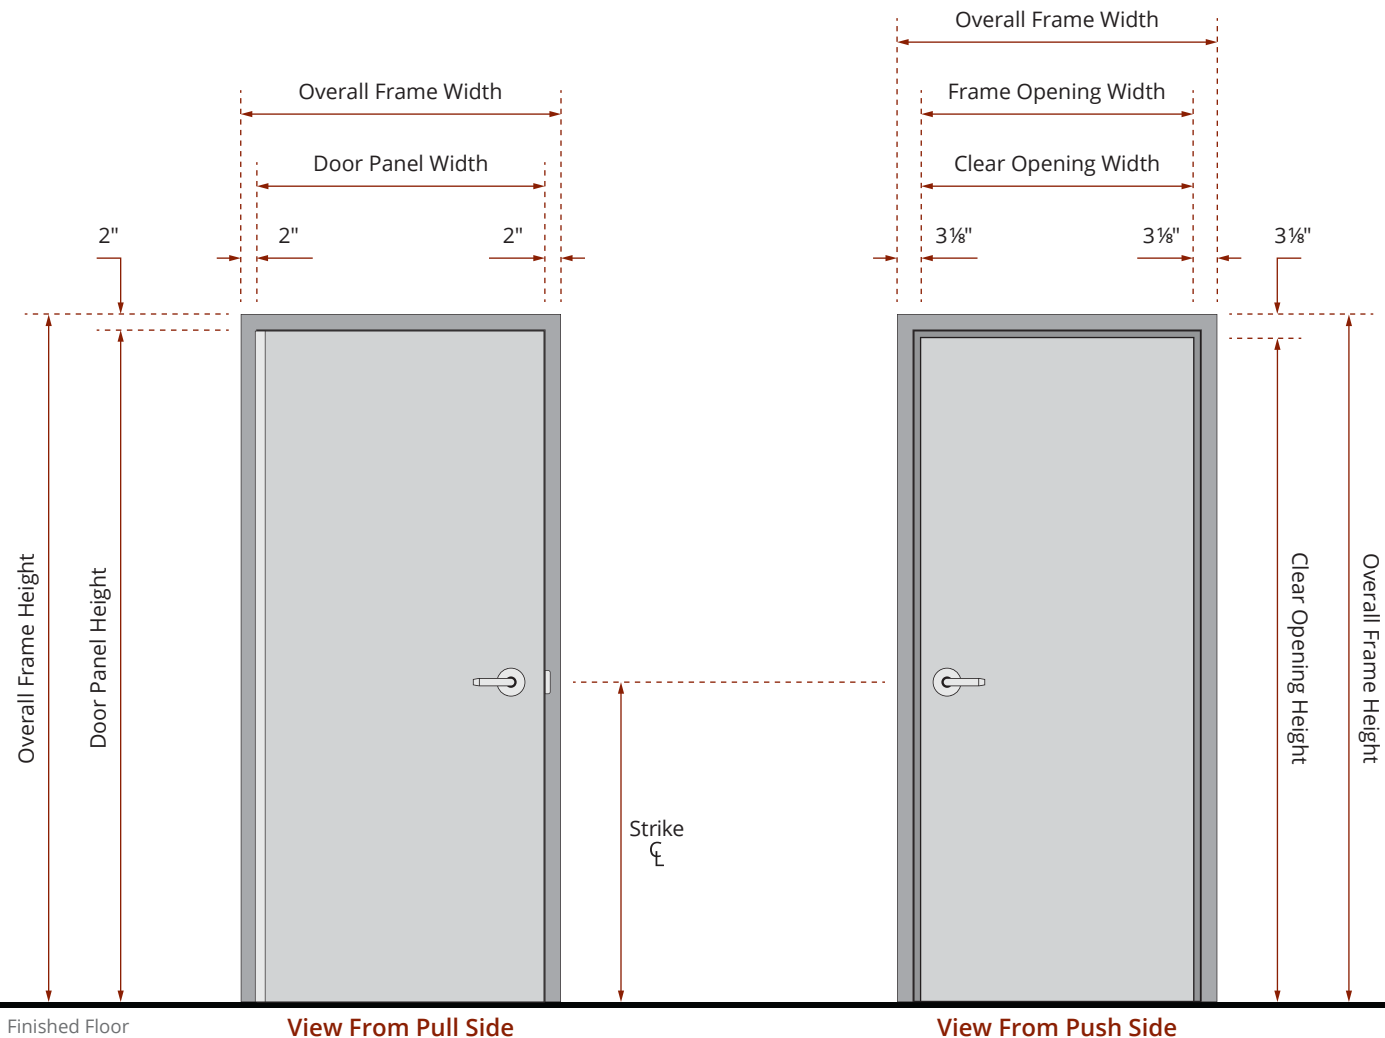

Door Hanging Options


KriegerBullet doors are available in any door handing configuration your project requires.






Elevation View

Double Door With Mullion

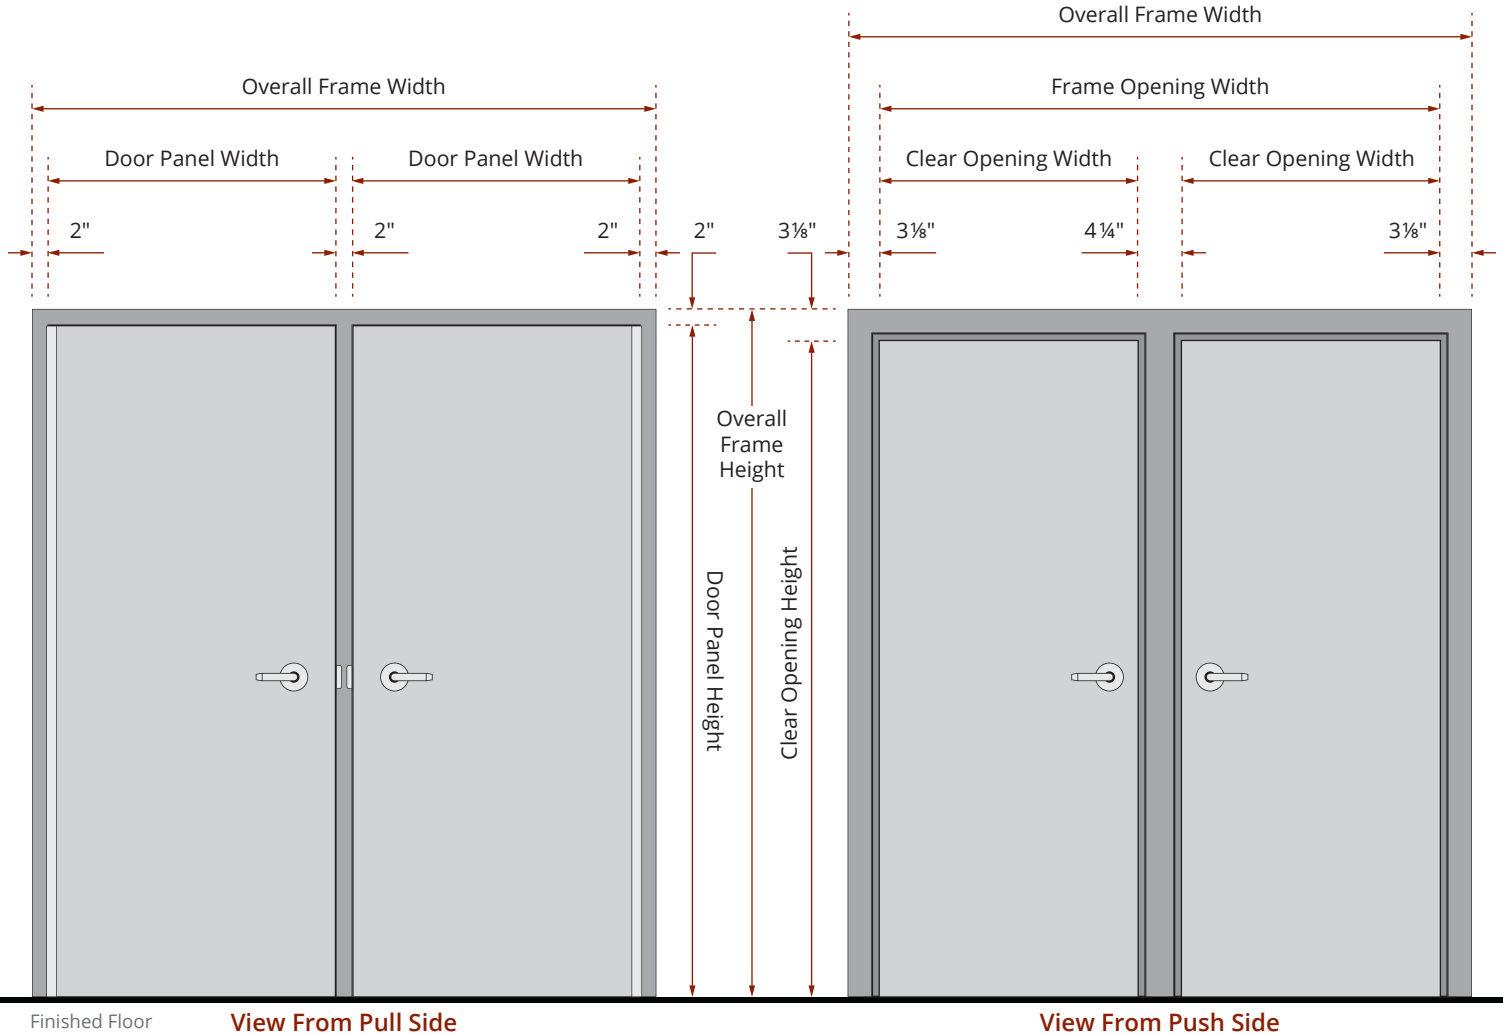

Door Hanging Options


KriegerBullet doors are available in any door handing configuration your project requires.

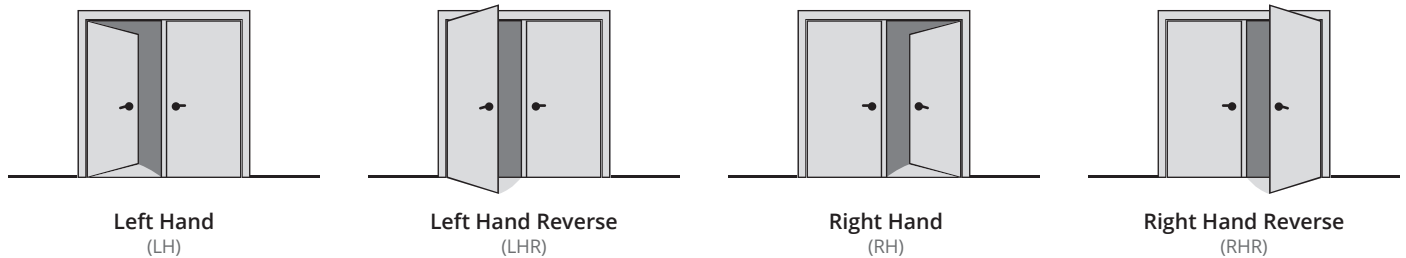




Elevation View

Double Door With Astragal

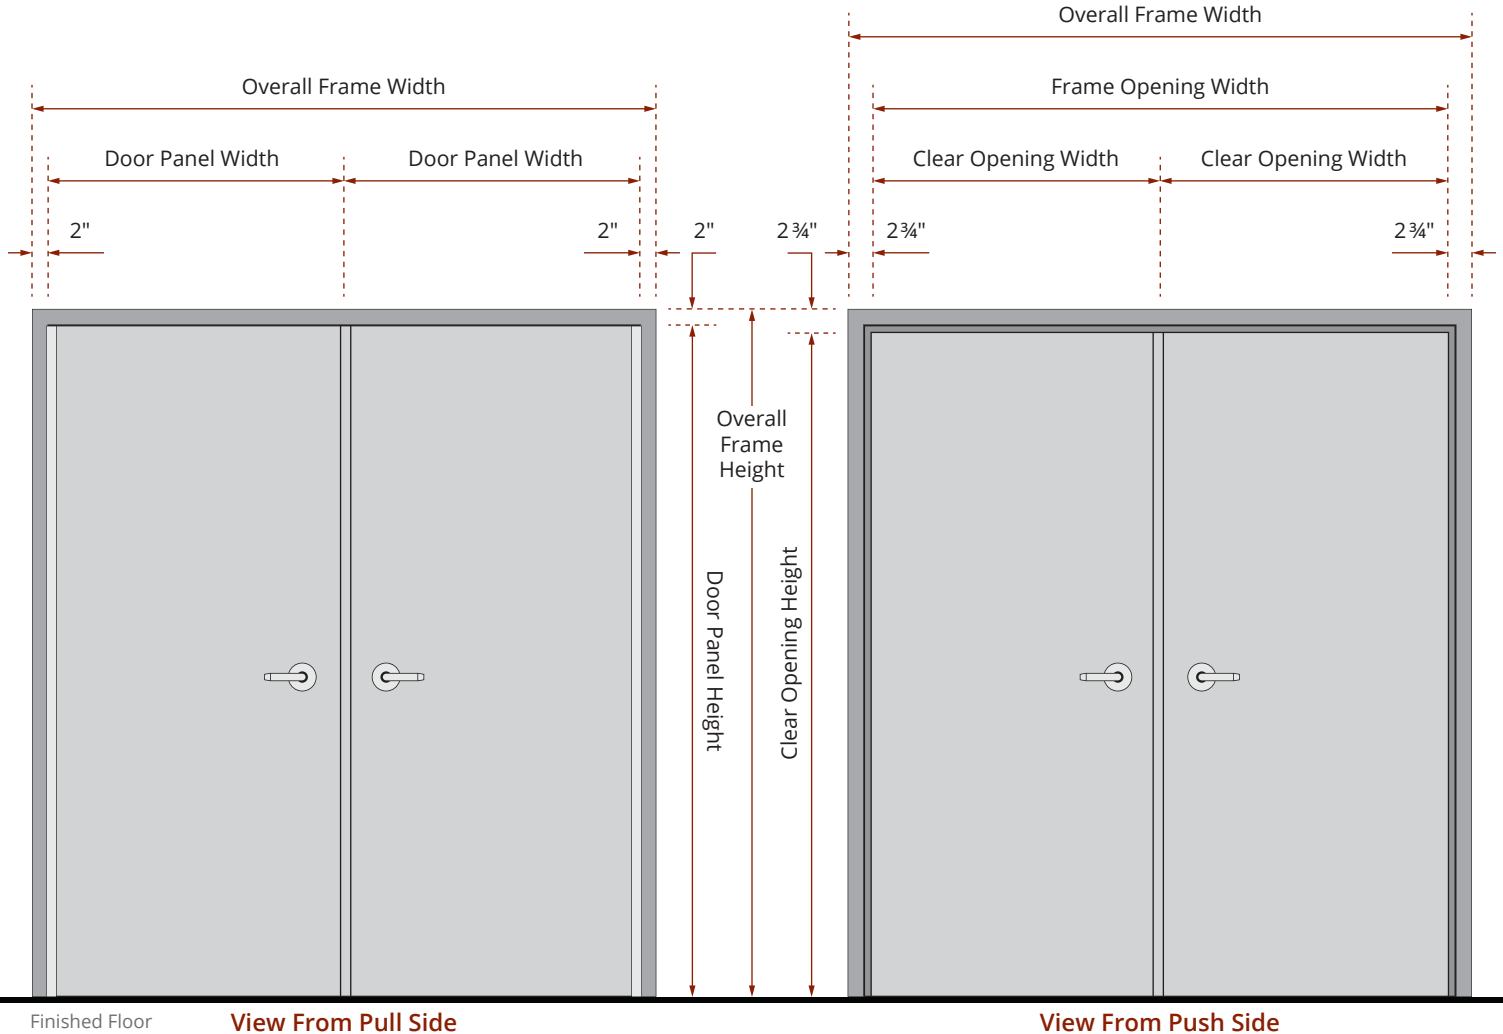

Door Hanging Options

KriegerBullet doors are available in any door handing configuration your project requires.

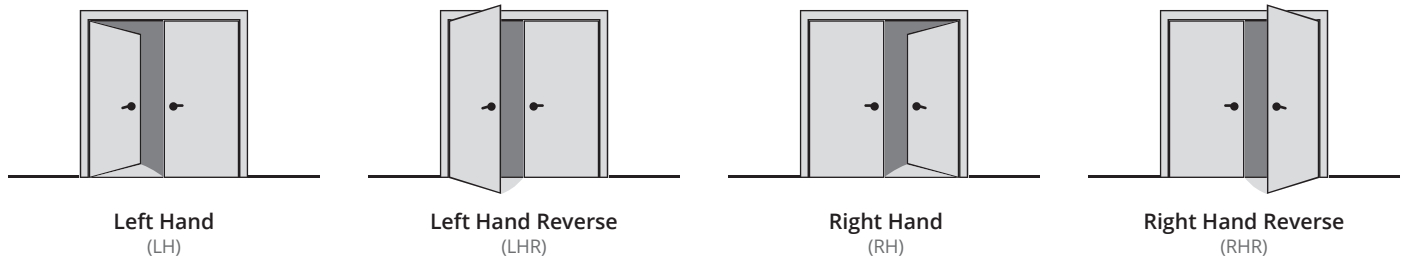




Frame Detail

Slip-In With Trim Frame

Z anchor, nailing straps, T anchor, and punch & dimple frames are also available.

Door Panel


Comes with a typical 1 $\frac{3}{4}$ " thick door panel with a seamless edge on the top and sides, and an adjustable door bottom.

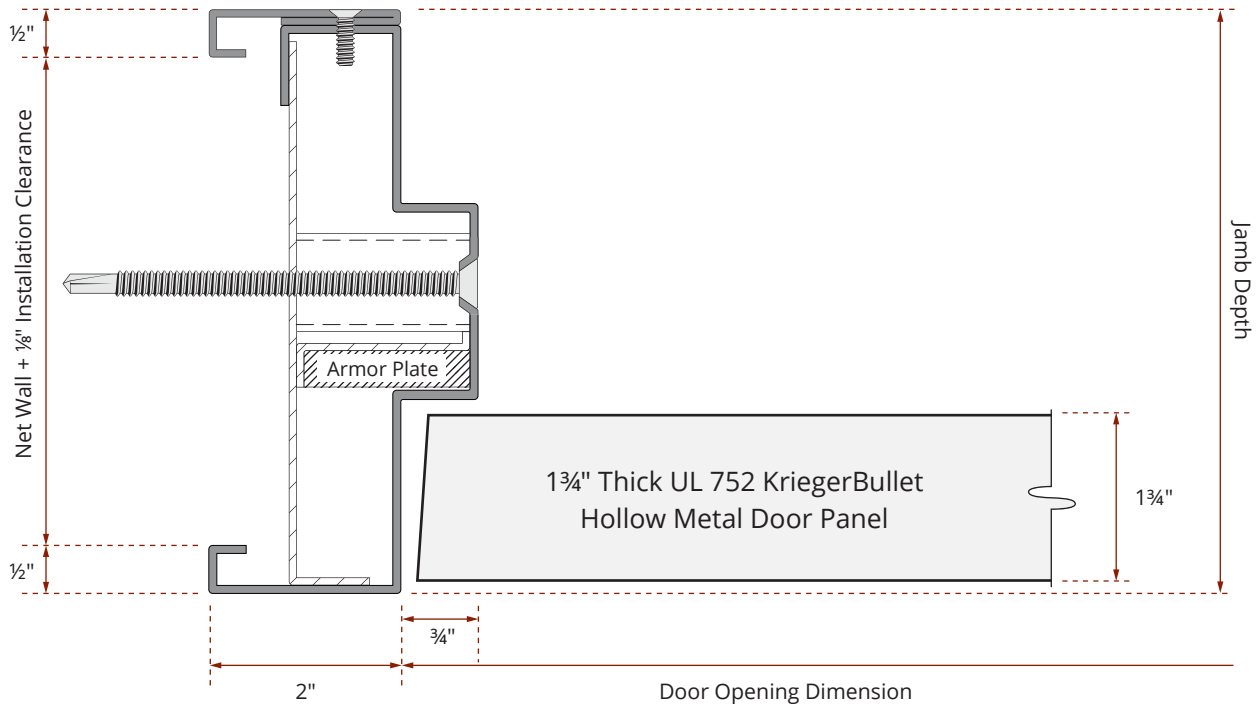



Frame Detail


Mullion Detail

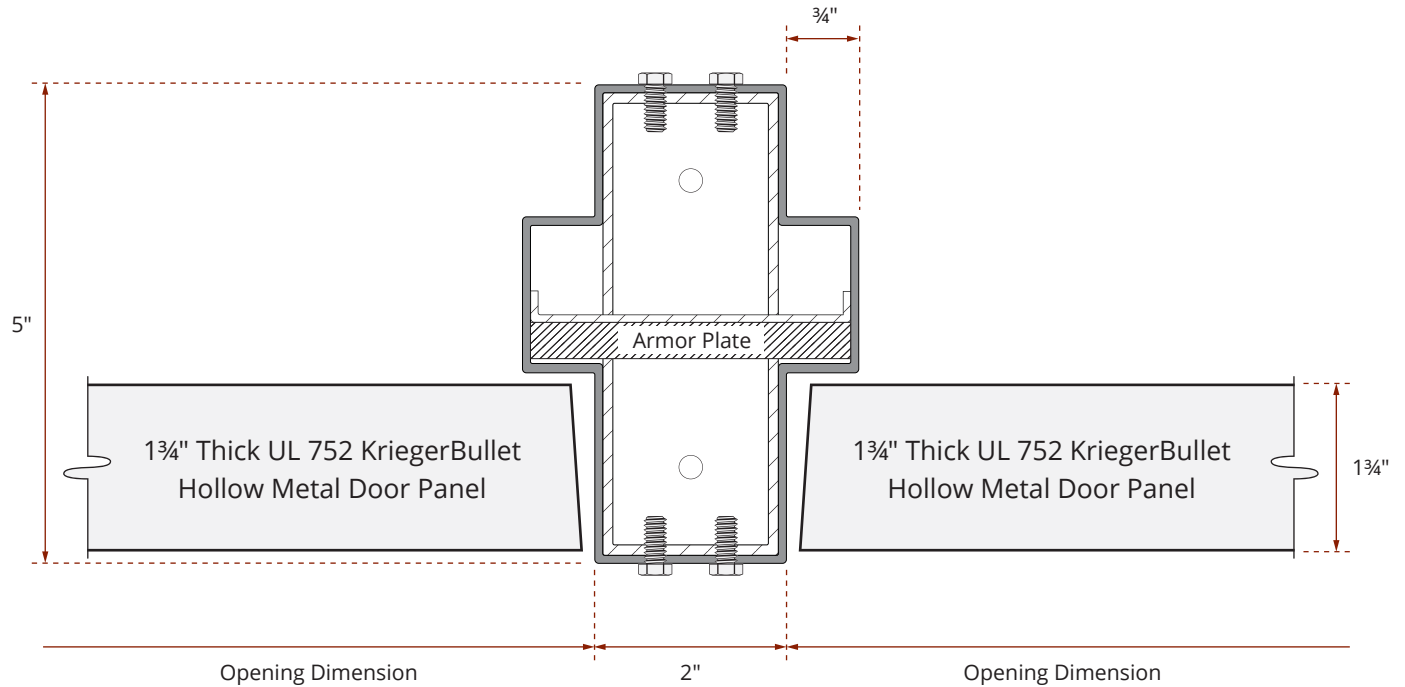



Frame Detail

Astragal Detail

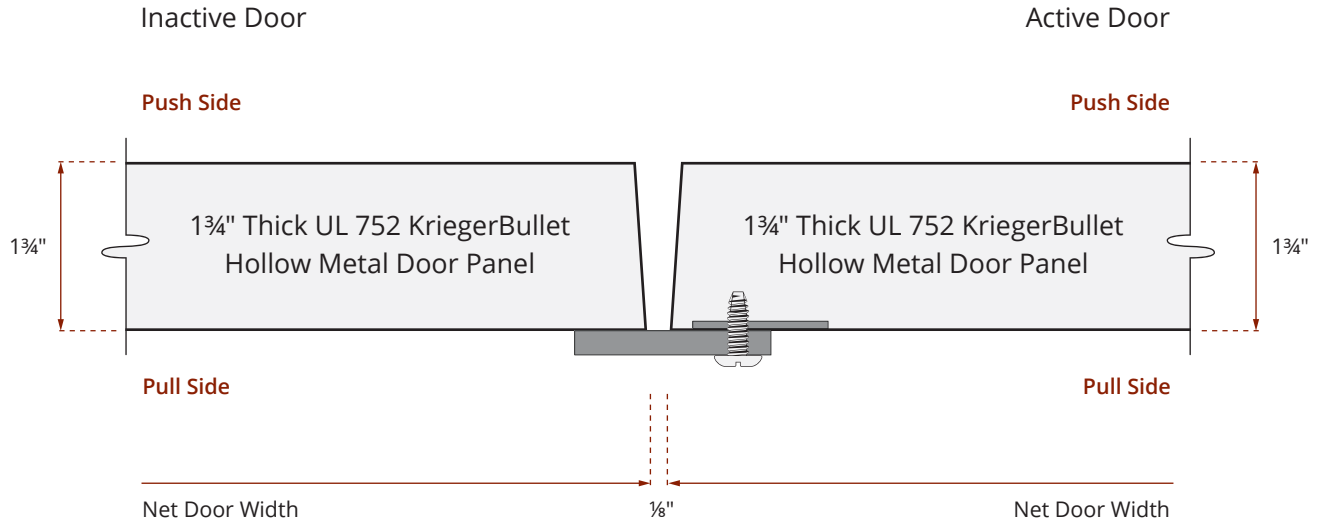



Door Bottom

Adjustable Door Bottom Detail

