


705 SCIF DOOR & LOCK PACKAGE: SECONDARY EXIT ONLY 100% ICD 705 CERTIFIED

3'-0" x 7'-0" 3 Sided Frame and Door Assembly

- Krieger's 705 package meets SCIF sound groups 3 and 4 standards and comes with a Von Duprin EO-98-ALK-F.
- The customizable 705 SCIF package includes: Slip-in telescoping frame, acoustical door, hinges, closer, lockset threshold, door bottom & seal system.
- The 2 piece slip in frame can be adjusted to fit wall thicknesses from 5" up to 6-1/4".
- The package is shipped as one boxed unit with the majority of the hardware installed.
- The package be ordered online with a credit card at: <https://www.kriegerproducts.com/705-door-package/>

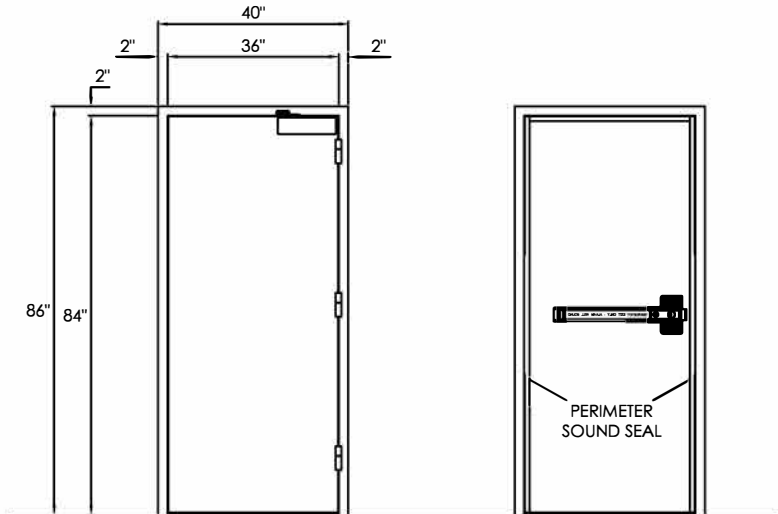


VIEW FROM PULL SIDE (UNSECURE SIDE)

VIEW FROM PUSH SIDE (SECURE SIDE)

705 Secondary Exit Hardware Information


- Conforms to FF-L-2890.
- Exit alarm included.
- US26D satin chrome finish, smooth mechanism case.
- Input voltage: 24 volt DC, intermittent duty.
- The Von Duprin 299F strike ships standard.
- UL listed for fire exit hardware.

INSIDE ROOM, OR SECURE SIDE



705 Performance Information

- Can be manufactured to meet Level 3 (STC:45, NIC:40) and Level 4 (STC:50, NIC: 45) requirements per ASTM- E90.
- Can be fire-rated from 20-minutes to 3-hours per UL10C.

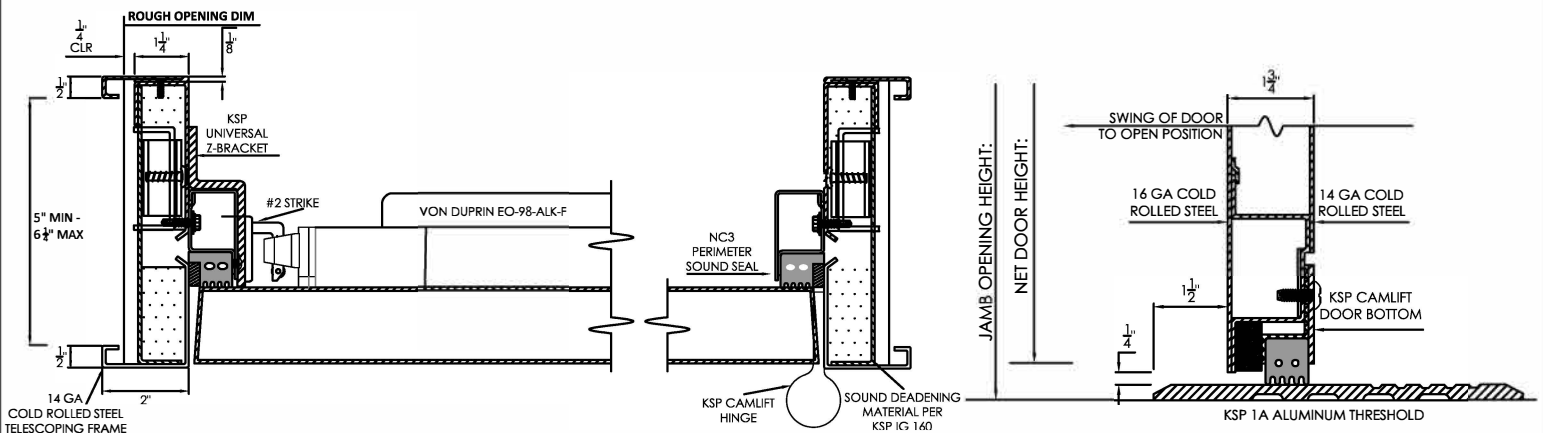

HORIZONTAL SECTION

VERTICAL SECTION

ALL DIMENSIONS IN INCHES