


FILL SOLID WITH SOUND DEADENING MATERIAL
(REFER TO PIB #160).

KRIEGERSONIC NC3
COMPRESSION SOUND
SEAL.

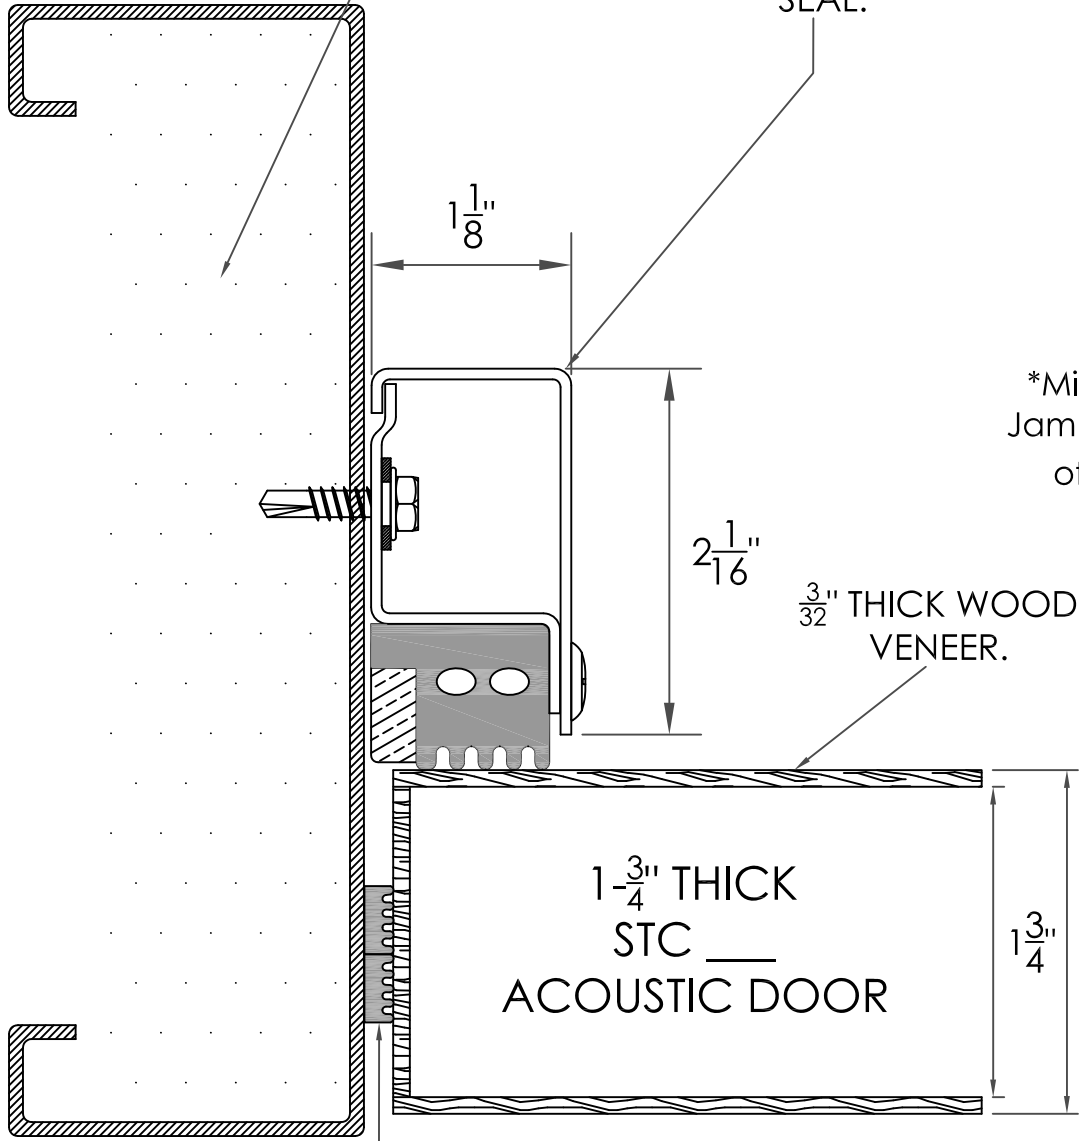

*Minimum
Jamb Depth
of $4\frac{3}{4}$ "*

1076 NEOPRENE SEAL
APPLIED AFTER FINISH
PAINT BETWEEN DOOR &
FRAME.

JAMB OPENING DIMS:

Kriegersonic NC5 Compression Seal with WDV



Pico Rivera, CA 90660
(562) 695 - 0645