


(Hinge Jamb Shown)

FILL SOLID WITH SOUND DEADENING MATERIAL
(REFER TO PIB #160).

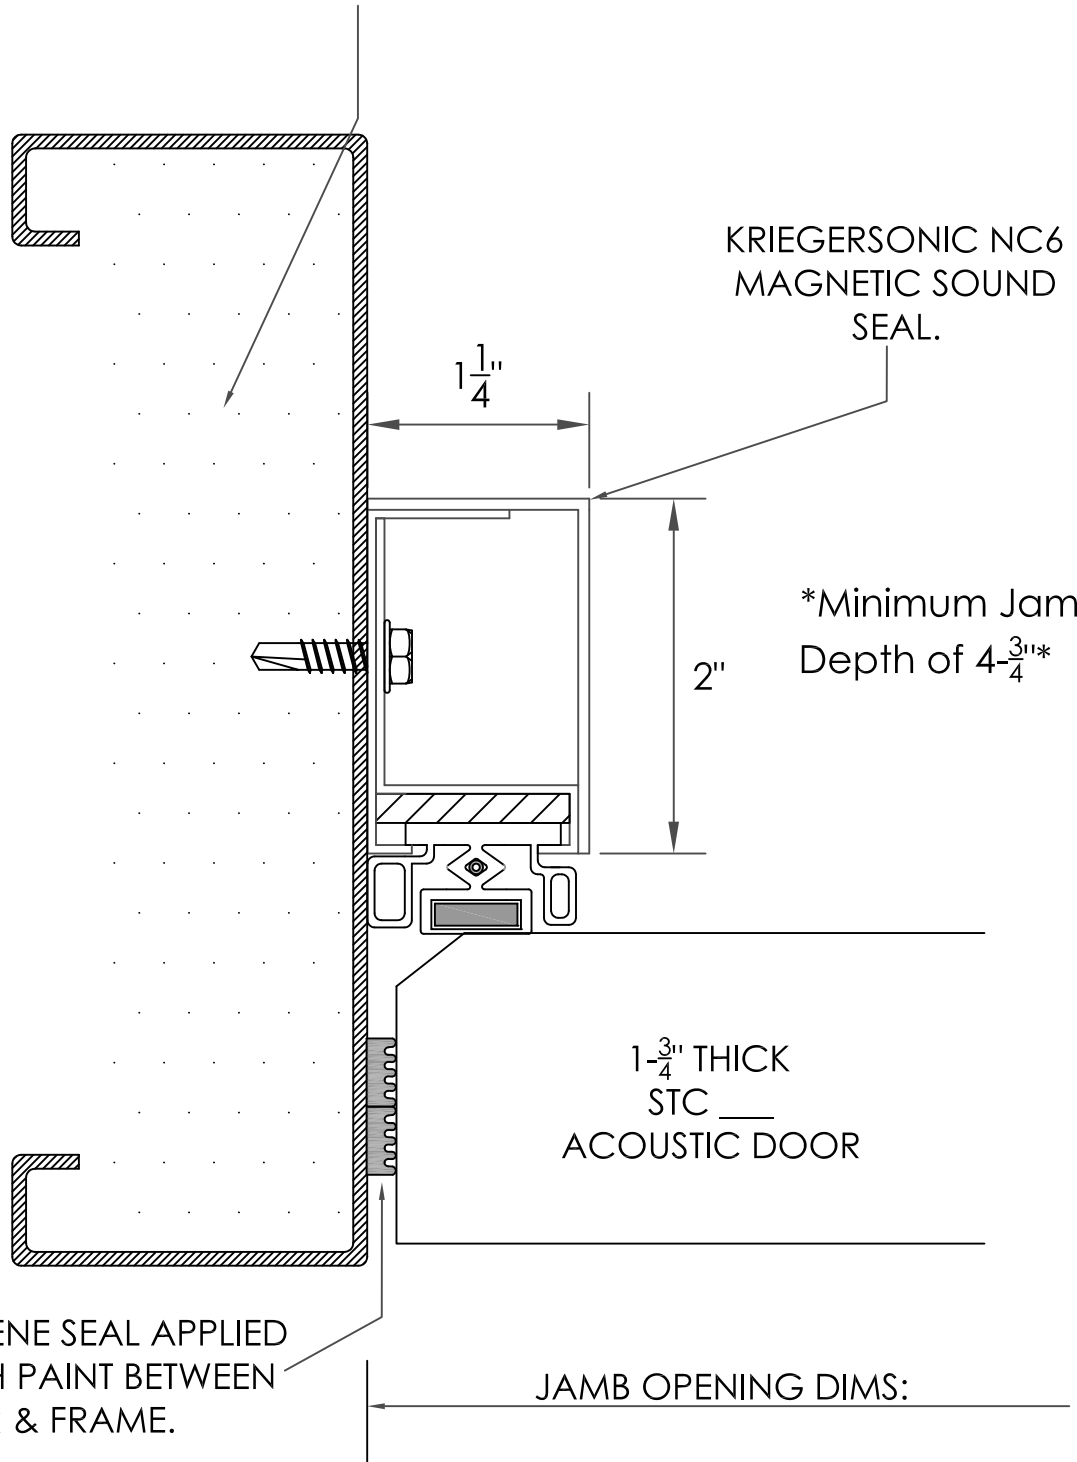

KRIEGERSONIC NC6
MAGNETIC SOUND
SEAL.

1 1/4"

2"

*Minimum Jamb
Depth of 4-3/4"

1-3/4" THICK
STC ____
ACOUSTIC DOOR

1076 NEOPRENE SEAL APPLIED
AFTER FINISH PAINT BETWEEN
DOOR & FRAME.

JAMB OPENING DIMS:

Kriegersonic NC7 Magnetic Seal



Pico Rivera, CA 90660
(562) 695 - 0645