

705 SENSITIVE COMPARTMENTED INFORMATION FACILITY (SCIF) DOOR & LOCK PACKAGE. 100% ICD 705 CERTIFIED.

3'-0" x 7'-0" 3 Sided Frame and Door Assembly



- Krieger's 3070 705 package meets SCIF sound groups 3 and 4 standards and comes with your choice of a Sargent & Greenleaf 2890B or Lockmasters LKM10K security device factory-installed.
- The customizable 705 SCIF package includes: Slip-in telescoping frame, acoustical door, hinges, closer, lockset, threshold, door bottom & seal system.
- The 2 piece slip in frame can be adjusted to fit wall thicknesses from 5" up to 6-1/4".
- Rough Opening (RO) size: 39" x 85-1/2".
- The package is shipped as one boxed unit with the majority of the hardware installed.
- The package can be ordered Online with a credit card at: <https://www.kriegerproducts.com/705-door-package/>
- 2 Year warranty covering all components.

705 Hardware Information:


- Conforms to FF-L-2890.
- LKM10k with panic bar or push pull option.
- S&G 2890B with panic bar or lever/lever option.
- Choice of X-10 or 2740 dial with either hardware option.
- Von Duprin EO-99-ALK-F Secondary exit option.

705 Performance Information:

- Can be manufactured from STC-45 up to STC-53 per ASTM-E90 (*Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions*)
- Can be fire-rated from 20-minutes up to 3-hours per UL10C.

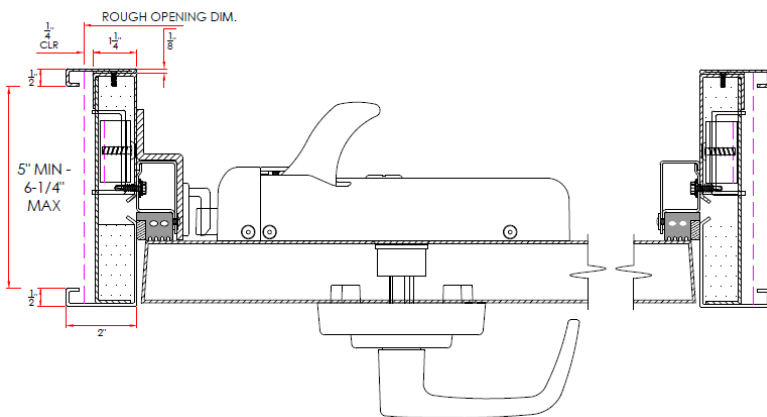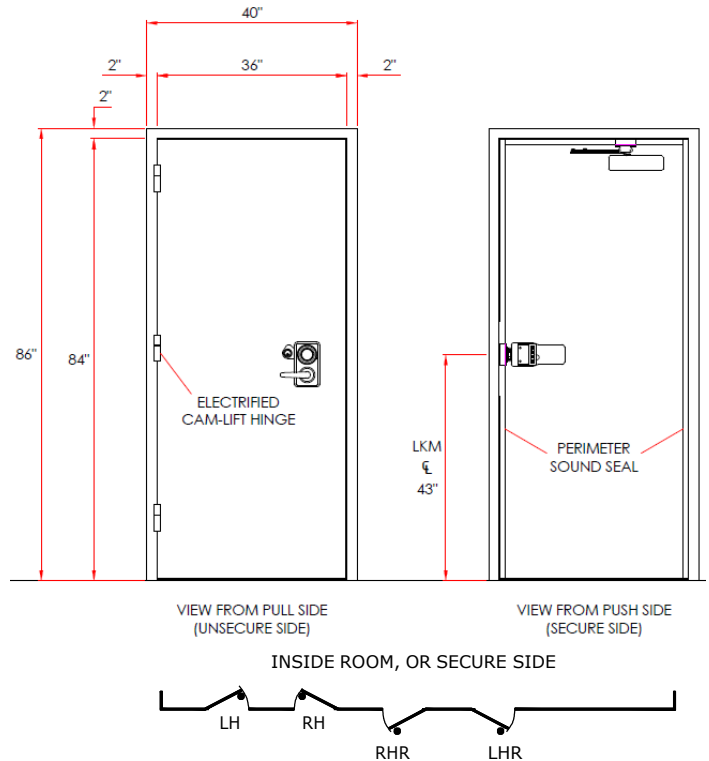

HORIZONTAL SECTION

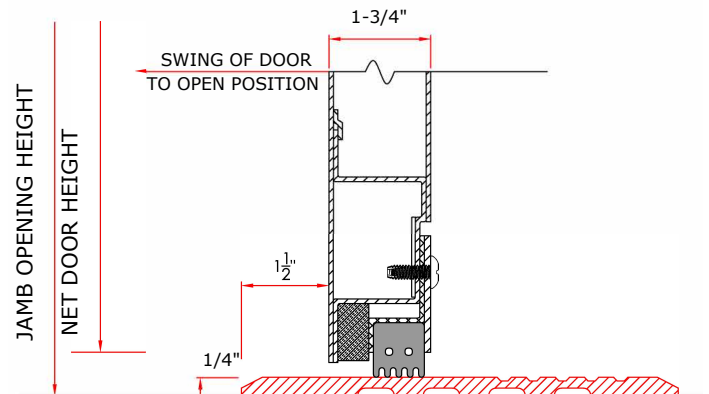

VERTICAL SECTION